

GAS A SQUADRA - IVR 113 - IVR 114




Rubinetto a sfera a squadra per gas per tubo flessibile estensibile UNI-CIG 9891/91.
 Attacchi filettati gas Maschio e Femmina - dado girevole.

*Angle ball valve with spread for gas flexible metallic pipe UNI-CIG 9891/91.
 Threaded ends Male and Female with swivel outlet.*

Robinet à sphère d'équerre pour gaz pour tuyau flexible métallique UNI-CIG 9891/91.
 Taraudage pas gas Mâle et Femelle avec ecrou.



*Kugelhahn für Gas, Eckform flexiblen Metallschlauch UNI-CIG 9891/91.
 Anschlussgewinde A-I und drehbare mutter.*

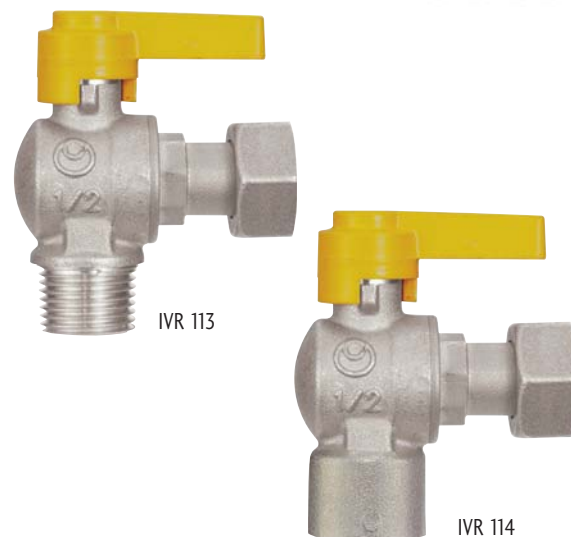

IMPIEGHI: Le valvole a sfera serie GAS A SQUADRA sono adatte per impianti di distribuzione gas a bassa pressione.

APPLICATIONS: The GAS A SQUADRA series are suitable for plants of gas supply at low pressure.


N. N.	DENOMINAZIONE PART NAME	MATERIALE MATERIAL	TRATTAMENTO TREATMENT
1	Corpo - Body	Ottone - Brass CW 617N - UNI EN 12165/98	Nichelato - Nickel plated
2	Manicotto - Body end	Ottone - Brass CW 617N - UNI EN 12165/98	Nichelato - Nickel plated
3	Seggio - Seat	PTFE	
4	Sfera - Ball	Ottone - Brass CW 617N - UNI EN 12165/98	Cromata - Chrome plated
5	Asta - Stem	Ottone - Brass CW 614N - UNI EN 12164/98	
6	O-Ring - O-Ring	HNBR	
7	Maniglia - Handle	Alluminio - Aluminium	Verniciato - Painted
8	Vite - Screw	Acciaio - Steel	
9	Filo - Wire	Bronzo fosforoso - Bronze	
10	Dado - Nut	Ottone - Brass CW 617N - UNI EN 12165/98	Nichelato - Nickel plated

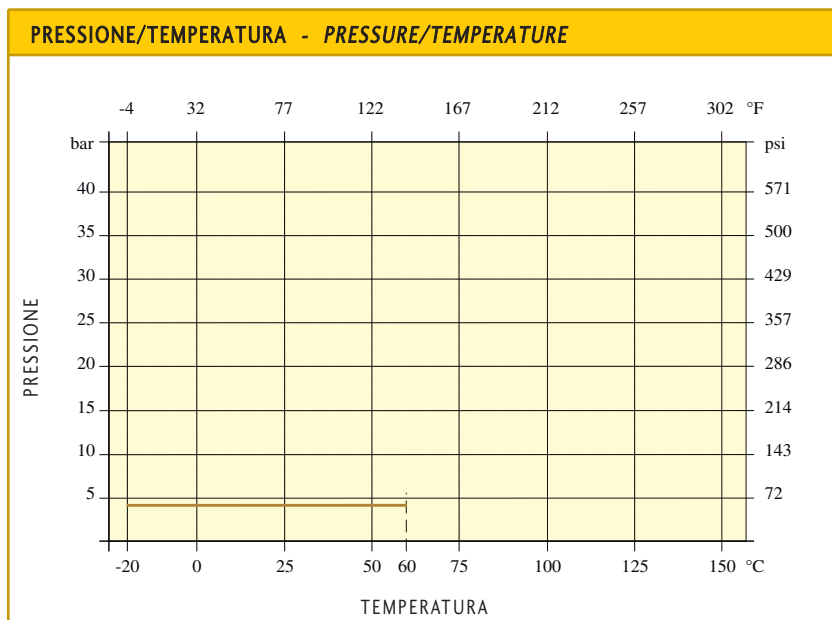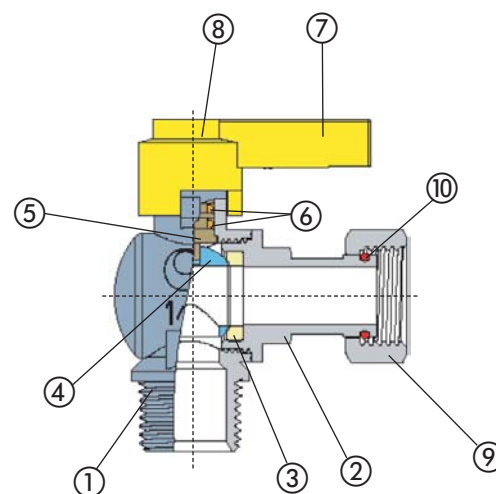


DATI TECNICI - TECHNICAL DATA

Pressione di esercizio Working pressure	4 bar
Temperatura di esercizio Working temperature	-20°C + 60°C
Filettatura estremità Threaded ends	UNI ISO 7/1 UNI ISO 228/1
Asta anticoppio Anti blow-out stem	



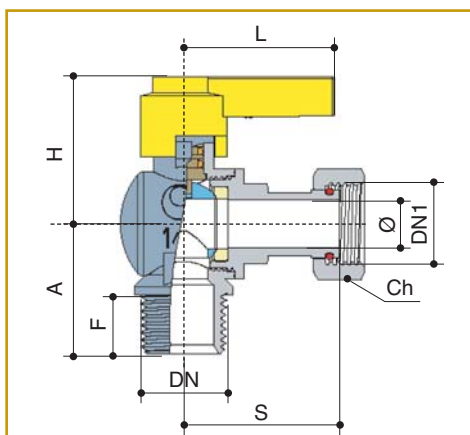

IVR 113

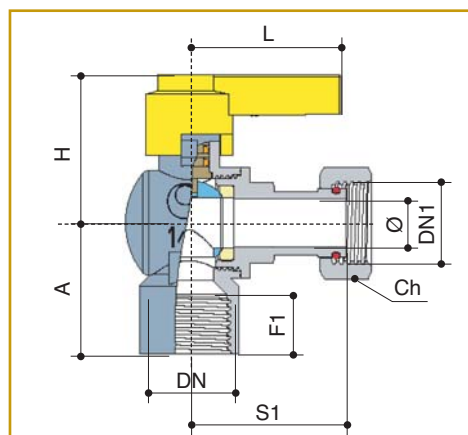


IVR 114

DN	1/2"x1/2"	1/2"x3/4"
Ø	12,5	12,5
F	15	15
F1	15	15
S	39,5	39,5
S1	39,5	39,5
A	33	33
H	38	38
L	38	38
Ch	25	30

Dimensioni in mm - Dimensions in mm

DIAGRAMMA PERDITE DI CARICO - FLOW AND PRESSURE DROP

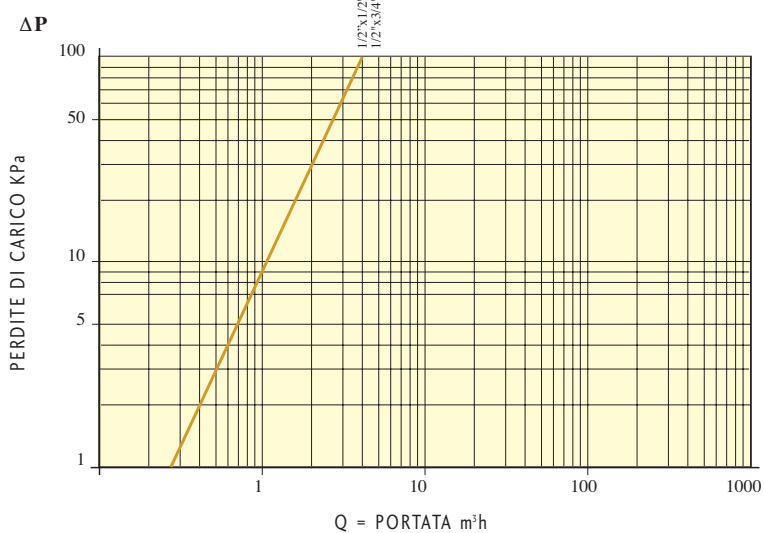

COEFFICIENTE KV - KV FACTOR

1/2" X 1/2" - 12,5	4
1/2" X 3/4" - 12,5	4