

OCEAN - DZR - IVR 20



Valvola a sfera a passaggio totale in ottone DZR.

Attacchi filettati gas F/F.


DZR brass full bore ball valve.

Threaded ends F/F.

Vanne à sphère à passage intégral en laiton DZR.

Tarudage pas gaz F/F.


Kugelhahn mit vollem Durchgang aus entzinkungsarmes messing. Anschlussgewinde I/I.

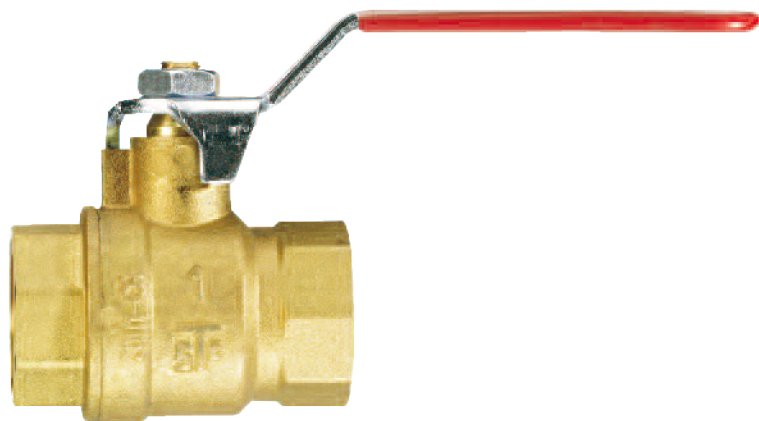


IMPIEGHI: Le valvole a sfera serie OCEAN sono adatte per acqua potabile.

APPLICATIONS: The OCEAN series are suitable for use in water supply plants.

N. N.	DENOMINAZIONE PART NAME	MATERIALE MATERIAL	TRATTAMENTO TREATMENT
1	Corpo - Body	Ottone DZR - DZR Brass CW 602N - UNI EN 12165/98	
2	Manicotto - Body end	Ottone DZR - DZR Brass CW 602N - UNI EN 12165/98	
3	Seggio - Seat	PTFE	
4	Sfera - Ball	Ottone DZR - DZR Brass CW 602N - UNI EN 12165/98	Cromata - Chrome plated
5	Asta - Stem	Ottone DZR - DZR Brass CW 602N - UNI EN 12164/98	
6	O-Ring - O-Ring	NBR	
7	O-Ring - O-Ring	HNBR	
8	Maniglia - Handle	Acciaio - Steel	Rivest. PVC - Plastic coated
9	Dado - Nut	Acciaio - Steel	Zincato - Zinc plated

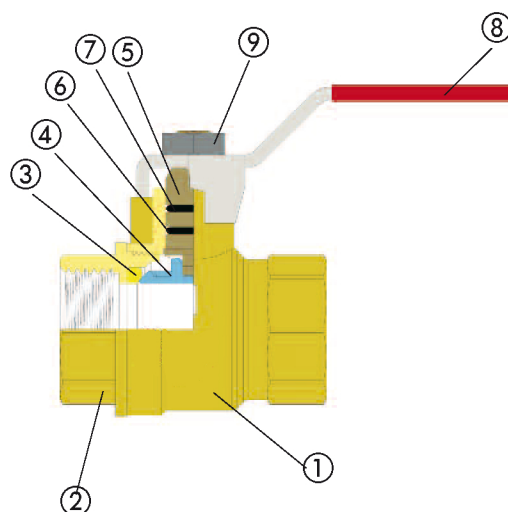


PRESSIONE/TEMPERATURA - PRESSURE/TEMPERATURE

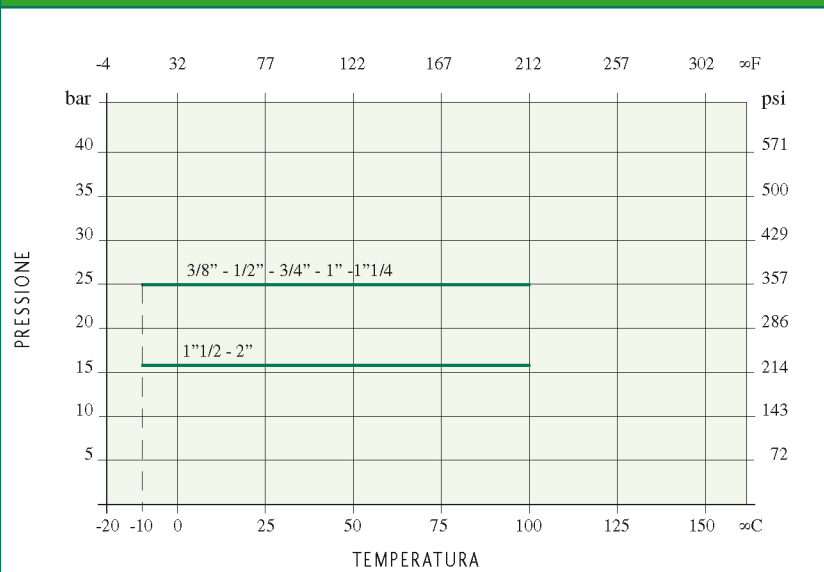


DATI TECNICI - TECHNICAL DATA

Pressione di esercizio Working pressure	3/8" - 1"1/4 25 bar 1"1/2 - 2" 16 bar
Temperatura di esercizio Working temperature	-10°C + 100°C
Filettatura estremità Threaded ends	UNI ISO 228/1
Asta antisceppio Anti blow-out stem	

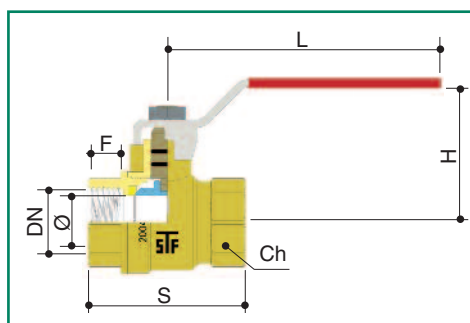

IVR 20

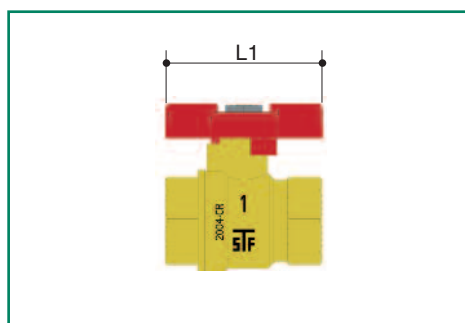


IVR 20/A

DN	3/8"	1/2"	3/4"	1"	1"1/4	1"1/2	2"
Ø	10	15	20	25	32	40	50
F	12	13,5	14,5	16	17	18	22
S	43	55	61	72	82	94	112
H	41	54	58	66	71	80	88
L	80	90	90	125	125	140	140
L 1	52	62	62	72			
Ch	21	25	31	38	47	54	66

Dimensioni in mm - Dimensions in mm

DIAGR. PERDITE DI CARICO - FLOW AND PRESSURE DROP

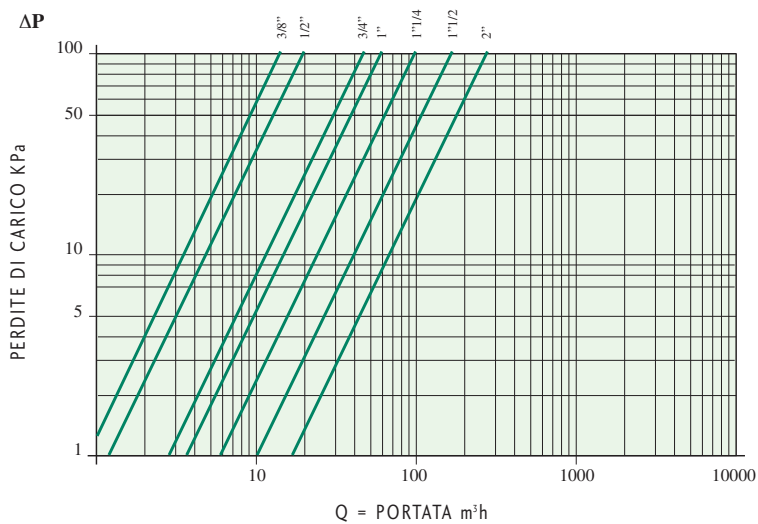

COEFFICIENTE KW - KW FACTOR

3/8" - 10	15
1/2" - 15	20
3/4" - 20	45
1" - 25	60
1"1/4 - 32	100
1"1/2 - 40	170
2" - 50	265