






IVR 813 AVANT FLOOR



-  Collettore di mandata con detentori micrometrici; collettore di ritorno con raccordi 3/4" EK.
-  Inlet manifold with lockshield; return manifold with 3/4" Eurocone connection.
-  Vorlaufverteiler mit mikrometrischen Rücklaufverschraubungen; Rücklaufverteiler mit 3/4" EK Verbindungsstück.
-  Collecteur d'alimentation avec détenteurs micrométriques; collecteur de retour avec sorties 3/4" EK.
-  Входной коллектор с отсекающими запорными клапанами; обратный коллектор с соединениями 3/4" евроконус.




Collettore in acciaio inox AISI 304 1" - 1"1/4, Connessioni 3/4" EK interasse 50 mm, zanche di fissaggio antivibrazione, etichette.

AISI 304 stainless steel manifold 1" - 1"1/4, 3/4" Eurocone connections centre hole distance 50 mm, mounting brackets which minimise noise and vibration, stickers.


Verteiler aus rostfreiem Edelstahl AISI 304 mit 1" - 1"1/4, 3/4" anschlüssen Eurokonus abstand 50 mm, schwingungsdämpfenden befestigungsklammern, etiketten.

Collecteur en acier inox AISI 304 1" - 1"1/4, fixations 3/4" EK entraxes 50 mm, plaques d'ancrage anti-vibration, étiquettes.

Коллектор из нержавеющей стали AISI 304, размеры 1" - 1"1/4, 3/4" соединения Евроконус межосевое расстояние 50 мм, крепления с защитой от вибрации, инструкция по сборке.

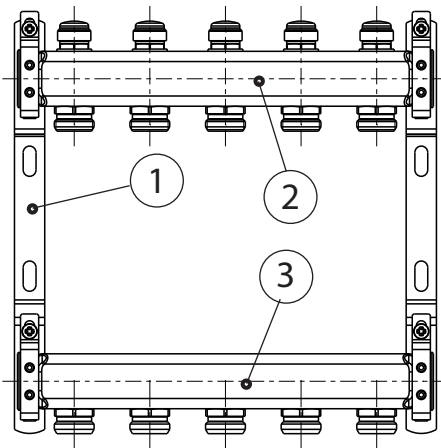


N	DENOMINAZIONE PART NAME	MATERIALE MATERIAL	TRATTAMENTO TREATMENT
1	Zanca Acciaio Mounting brackets	Acciaio Steel	Zincata Zinc plated
2	Collettore con detentori Manifold with Lockshields	Acciaio inox AISI 304 Stainless steel AISI 304	
3	Collettore con raccordi Eurocono Manifold with Eurocone connections	Acciaio inox AISI 304 Stainless steel AISI 304	



Dati tecnici - Technical data

Pressione massima di esercizio
Max. working pressure 10 bar

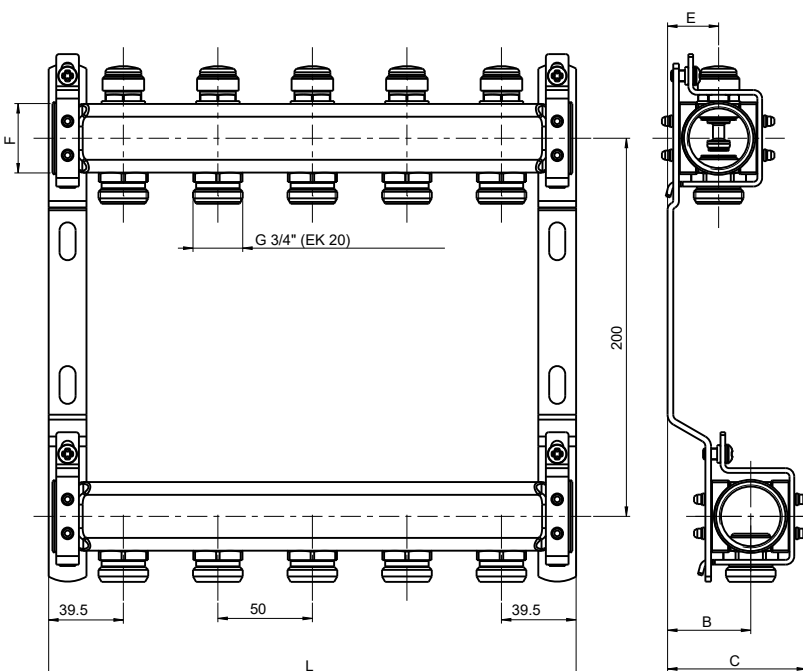

Code	Tippe	F	L	B	C	E
181322502	2 vie	G 1"	129	44	73.5	27
181322503	3 vie	G 1"	179	44	73.5	27
181322504	4 vie	G 1"	229	44	73.5	27
181322505	5 vie	G 1"	279	44	73.5	27
181322506	6 vie	G 1"	329	44	73.5	27
181322507	7 vie	G 1"	379	44	73.5	27
181322508	8 vie	G 1"	429	44	73.5	27
181322509	9 vie	G 1"	479	44	73.5	27
181322510	10 vie	G 1"	529	44	73.5	27
181322511	11 vie	G 1"	579	44	73.5	27
181322512	12 vie	G 1"	629	44	73.5	27
181332506	6 vie	G 1"1/4	329	46.5	79.5	29.5
181332507	7 vie	G 1"1/4	379	46.5	79.5	29.5
181332508	8 vie	G 1"1/4	429	46.5	79.5	29.5
181332509	9 vie	G 1"1/4	479	46.5	79.5	29.5
181332510	10 vie	G 1"1/4	529	46.5	79.5	29.5
181332511	11 vie	G 1"1/4	579	46.5	79.5	29.5
181332512	12 vie	G 1"1/4	629	46.5	79.5	29.5

Ed.:09/16

Tutte le caratteristiche tecniche dei prodotti sono soggette a modifiche senza preavviso - All product's technical specifications are subject to modification without prior notice